

**Corrugated Stainless Steel Flexible Connectors
CLACK
Specification Sheet**

SPECIFICATION:

Furnish and install Corrugated Stainless Steel Connectors for CLACK bypass

**Features Clack's QC (quick connect) design
Clack nut, o-ring & split-ring required
Fits Clack 1" and 1-1/4" valves and bypass**

DESIGN FEATURES: Mega-flow SUPER Water-flex™

- 304 Series Stainless Steel
- Maintains optimum flow – No Restriction


- Kink and Crimp Free
- Chrome plated brass nuts
- Extremely Flexible

- Will not corrode or rust
- No Dielectric union required
- Highest Quality EPDM washer
- Resists work hardening
- Working pressure 200 psi
- Burst pressure 1850 psi
- 100% Leak Tested
- Limited Lifetime Warranty
- Temperature rating 40 – 250 degrees F
- Easy Installation

COMPLIANCES/LISTINGS:

- * IAPMO Listed
- * UPC/cUPC
- * ASME A112.18.6F
- * IAPMO Tested to NSF 61

AVAILABLE SIZES for CLACK bypass
Clack QC x 3/4" FIP x 18"
Clack QC x 1" FIP x 18" & 24"
Clack QC x QC x 18" & 24"

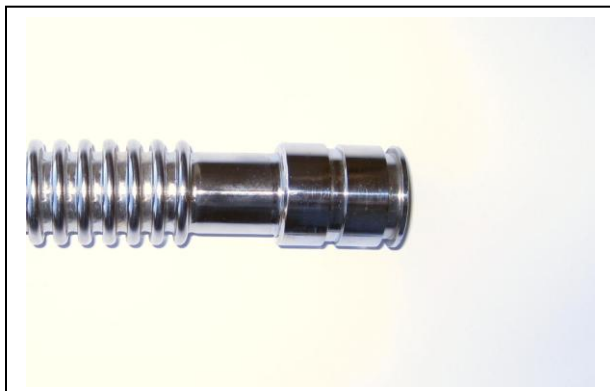

Product Submittal

Job Name: _____

Date: _____

Model# _____ Quantity: _____

Architect/Contractor: