

**Corrugated Stainless Steel Flexible Connectors  
 GE Autotrol Bypass & Performa Valve  
 Specification Sheet**

**SPECIFICATION:**

Furnish and install Corrugated Stainless Steel Connectors for GE Autotrol bypass & Performa Valve Manufactured by Falcon Stainless, Inc.

**COMPLIANCES/LISTINGS:**


- \* IAPMO Listed
- \* UPC
- \* ASME A112.18.6
- \* IAPMO Tested to NSF 61

**DESIGN FEATURES: Mega-flow SUPER Water-flex™**

- 304 Series Stainless Steel
- Maintains optimum flow – No Restriction
- Kink and Crimp Free
- Chrome plated brass nuts
- Extremely Flexible
- Will not corrode or rust
- No Dielectric union required
- Highest Quality EPDM washer
- Resists work hardening
- Working pressure 200 psi
- Burst pressure 1850 psi
- 100% Leak Tested
- Limited Lifetime Warranty
- Temperature rating 40 – 250 degrees F
- Easy Installation

**AVAILABLE SIZES for GE:**

- 1 3/8" x 3/4" x 12" & 18"
- 1 3/8" x 1" x 12" & 18"

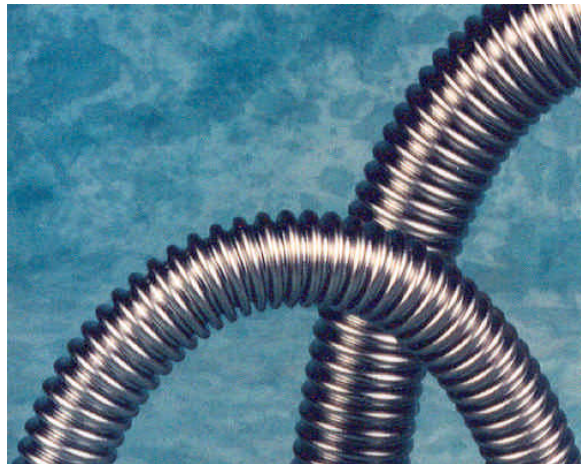

Fits Autotrol Bypass (Model 256 and 1265)  
 Fits: Directly on Performa Valve

256 Bypass fits Autotrol 255 Valve  
 1265 Bypass fits Performa Valve

Product Submittal

Job Name:

Date:

Model#

Quantity:

Architect/Contractor: